

# Lantech.com

## S-300XT

Simple Automation™  
Stretch Wrapping System

### Product Applications

- Light Loads
- High Volume
- Heavy Loads
- Tall Unstable Loads



Productivity

Providing creative solutions to help customers increase productivity.

■ Create Your Own System

Configure and price a stretch wrapper at [www.lantech.com](http://www.lantech.com).



### ■ Simple Automation™

- No operator involvement
- No getting on and off the forkluck
- No bending to attach and cut the film
- No pneumatic hookups, with 240V for easy installation



**ABCO KOVEX**  
POWERFUL PACKAGING SOLUTIONS

T +353.1.807 7600

F +353 1 807 7650

E [sales@abcokovex.com](mailto:sales@abcokovex.com)


To see our full range of products go to  
[www.abcokovex.com](http://www.abcokovex.com)

Go con  
Figure

# S-300XT

**Eliminate the "Run Around" with Simple Automation™**

*Simple Automation™ on our new S-300XT Stretch Wrap System automatically attaches and cuts the film...so your forklift operator will spend more time behind the wheel.*

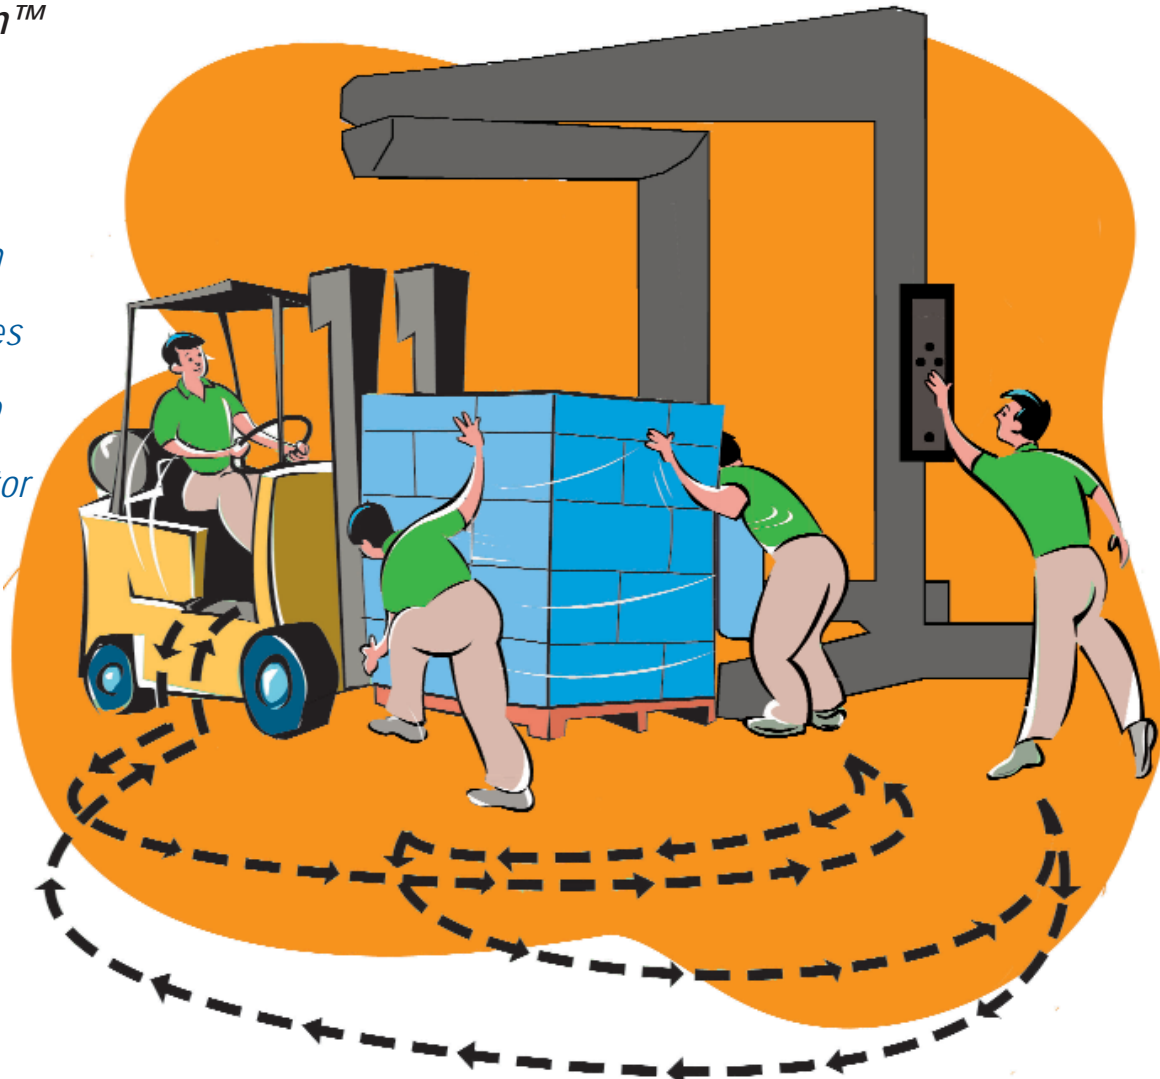

## S-300XT Specifications

### PERFORMANCE CRITERIA

- Production Speed 30-40 loads per hour  
based on 200 cm load height; 2 film layers and 12 revolutions
- Maximum Load Diagonal 200 cm.
- Maximum Load Height 200 cm.

### LOAD HANDLING SYSTEM

- Wrap Arm Speed 1-12 RPM
- Wrap Zone Size 230 cm diameter

### FILM DELIVERY SYSTEM

- Power Roller-Stretch® 200% Stretch (Standard)


### MACHINE SHIPPING WEIGHT

- Shipping Weight (including skid - approximate) 1750 kg

### OTHER INFORMATION

- Machine Size 398 x 365 x 307 cm.
- Operating Space 436 x 398 x 345 cm.
- Shipping Weight 1.540 kg.

307 cm  
Height

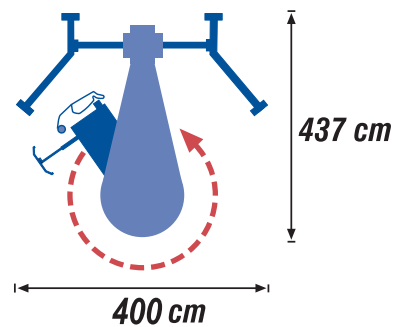

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2002

\* Maximum wrap height may vary based on film force, neckdown, and roll carriage travel speed.

MEMBER  
**PMMI**